


FB SERIES 2,000 / 3,000 / 3,500 lbs.

Four Wheel Electric Forklift Trucks

- Reliable, Durable, Consistent Power and Strength
- Quiet, Efficient, Easy Operation and Maintenance in your Indoor Work Environments
- Low Cost to Operate, Environmentally Friendly Equipment
- Powered exclusively with Tried, Tested, and Proven Curtis AC Control Systems

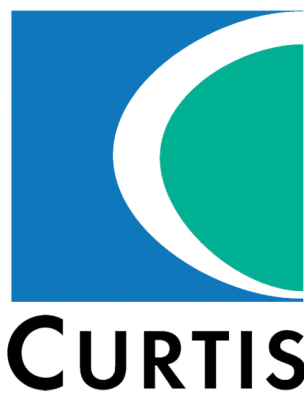

FB SERIES 10 - 15 - 18 ELECTRIC FORKLIFT MAST OPTIONS

TYPE	MODEL	LIFT HEIGHT (IN)	LOAD CAPACITY (LBS)			OVERALL HEIGHT (IN)			FREE LIFT (IN)		TILT ANGLE F/R (DEG)
			10	15	18	MAST LOWERED	MAST EXTENDED WITH LBR	MAST EXTENDED WITHOUT LBR	MAST EXTENDED WITH LBR	MAST EXTENDED WITHOUT LBR	
2-STAGE MAST	M200	78.8	1984	2977	3573	58.9	115.8	100.1			6/12
	M250	98.5	1984	2977	3573	68.8	135.5	119.8			6/12
	M300	118.2	1984	2977	3573	78.6	155.2	139.5			6/12
	M330	130.0	1984	2977	3573	84.5	167.1	151.3			6/12
	M350	137.9	1984	2977	3573	88.5	174.9	159.2			6/12
	M370	145.8	1984	2977	3573	92.4	182.8	167.1			6/12
	M400	157.6	1889*1989	2784*2983	3181*3580	100.3	194.6	178.9			6/12
	M450	177.3	1592*1889	2386*2685	2685*3181	110.1	214.3	198.6			6/6
	M500	197.0	1391*1991	2187*2586	2286*2983	119.9	234.0	218.3			6/6
	M550	216.7	1049*1592	1592*2386	1691*2785	131.8	253.7	238.8			3/6
2-STAGE FULL FREE	M600	236.4	697*1193	1049*1989	1193*2286	141.6	273.4	258.5			3/6
	Z200	78.8	1984	2977	3573	58.9	115.8	100.1	19.1	34.9	6/12
	Z250	98.5	1984	2977	3573	68.8	135.5	119.8	28.9	44.7	6/12
	Z300	118.2	1984	2977	3573	78.6	155.2	139.5	38.8	54.6	6/12
	Z330	130.0	1984	2977	3573	84.5	167.1	151.3	44.7	60.5	6/12
	Z350	137.9	1984	2977	3573	88.5	174.9	159.2	48.7	64.4	6/12
	Z370	145.8	1984	2977	3573	92.4	182.8	167.1	53.6	69.3	6/12
3-STAGE MAST	Z400	157.6	1889*1989	2784*2983	3181*3580	100.3	194.6	178.9	60.5	76.2	6/12
	S370	145.8	1984	2977	3573	69.7	182.6	167.3	31.1	46.9	6/6
	S400	157.6	1790*1984	2784*2983	3181*3580	73.7	194.4	179.1	36.1	51.8	6/6
	S435	171.4	1691*1889	2685*2784	3082*3380	78.6	208.2	192.9	39.4	55.2	6/6
	S450	177.3	1592*1889	2586*2784	2685*3181	80.6	214.1	198.8	42.9	58.7	6/6
	S480	189.1	1490*1790	2385*2685	2485*3082	84.5	225.9	210.6	46.9	62.7	6/6
	S500	197.0	1292*1790	1989*2586	2286*2983	88.5	233.8	218.5	50.8	66.6	6/6
	S550	216.7	994*1592	1391*2386	1691*2785	94.9	253.5	238.2	57.3	73.1	3/6
	S600	236.4	597*1490	994*1989	1193*2286	102.2	273.2	257.9	63.8	79.6	3/6

FB SERIES 10 - 15 - 18 ELECTRIC FORKLIFT SPECIFICATIONS										
GENERAL	MODEL		FB10		FB15		FB18			
	1		ELECTRIC		ELECTRIC		ELECTRIC			
	2		LBS		2204		3306		3968	
CHARACTERISTICS & DIMENSIONS	3		IN		19.7		19.7		19.7	
	4		IN		118.1		118.1		118.1	
	5		IN		36 x 4 x1.4		36 x 4 x1.4		36 x 4 x1.4	
	6		DEG		6/12		6/12		6/12	
	7		IN		16.5		16.5		16.5	
	8		IN		4.5		4.5		4.3	
	9		IN		84.6		84.6		90.3	
	10		IN		42.9		42.9		42.8	
	11		IN		78.5		78.5		78.5	
	12		IN		155.3		155.3		155.1	
PERFORMANCE	13		IN		85.4		85.4		80.3	
	14		IN		76.8		76.8		80.9	
	15		IN		80.7		80.7		84.6	
CHASSIS	16		MPH		9.3		9.3		9.3	
	17		IN/S		12.2		12.2		17.3	
	18		%		15		15		20	
POWER & TRANSMISSION	19		V/Ah		48/400		48/400		48/495	
	20		KW		8		8		8	
	21		KW		8.6		8.6		8.6	
TIRE	22		CURTIS		CURTIS		CURTIS		CURTIS	
	23		AC		AC		AC		AC	
	24		MPA		14.5		14.5		14.5	

