


2120 :: Pull Type Peanut Combine

The Amadas 2120 is the latest generation of our class-leading wide body PT combine, the benchmark by which all others are measured. The 2120 has new features to enhance performance, and updates to increase uptime and reduce cost of operation. The 2120 is available with new, higher capacity baskets in both BDS (Bin Dump System) and OCS (Off-load Conveying System). The Amadas 2120 is the world's #1 high capacity combine for harvesting in all conditions, setting the industry standard for excellence.

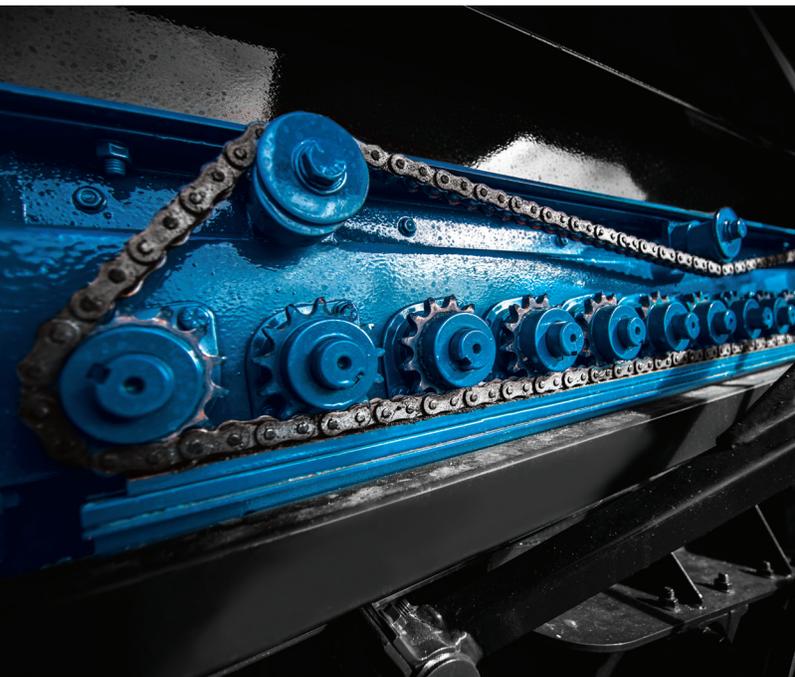

2120 :: Benefits

- **New Header** with 6 bar “cam-free” pickup, heavy duty offset spring teeth, single hydraulic motor design, and stainless steel header bands
- **New 8,750 lbs Dump Basket** with increased tip height (13’6”), 100% more dirt screening area, and high strength construction: CNC punched panels, stainless steel peanut duct, large service access panels
- **New 8,500 lbs OCS Basket** with faster unloading (25% faster), and high strength construction: CNC punched panels, stainless steel peanut duct, large service access panels
- **New Single Chain Disc Separator Drive**
- **New Heavy Duty (20k) Wheel Hubs & Spindles** with Goodyear radial tires

Combine Specifications

Length Overall:	29' - 6"	Width:	18 - 6"
Height (bin lip in):	15' - 0"	Height (bin lip out):	16' - 5"
Dump Height:	13' - 6"	Service height (bin raised):	30' - 11"
Weight (empty):	25,000 lbs	Header widths:	18', 19'
Inside working width:	96 - 1/4"	Bin capacity:	8,750 lbs
Tire size (std):	800/65 R32 high flotation cleated radial	Operation/warning light kit:	LED
Remote auger reverse:	Standard	Vine spreader:	Optional
Tongue:	Hydraulic height adjustable fixed tongue (standard) Hydraulic height adjustable side shift tongue (optional)		
Hitch type:	2", 1-1/2", 1-1/4" pin hitch (standard), 2-5/16" ball hitch (optional)		
Picking:	<ul style="list-style-type: none"> • Four 30" Ø spring-tooth picking cylinders • Adjustable retention board • Five sets adjustable concave breast spring teeth (optional) • Dual speed cylinder drives (optional) • Two sets adjustable overhead teeth (standard) 		
Separation system:	<ul style="list-style-type: none"> • Five retractable spring tooth cylinders • 15-roll disc separator • Two beater cylinders • 14" Ø 24-blade cross induction cleaning fan 		
Elevator system:	12" Ø collection auger to 9-1/2" square duct 28" Ø 12-blade centrifugal fan		
PTO input: 1000 RPM 1-3/4"-20 or 1000 RPM 1-3/8 -21 PTO driveline:	790 RPM input (standard) 850 RPM input (optional)		
Tractor Requirements::	PTO Horsepower: 200+ Hydraulic Capacity (OCS): 40gpm flow at combine PTO speed		

Note: The above specifications are for an 8,750 lbs Bin Dump equipped combine.

VISIT US ONLINE: To see the full benefits and spec details, download the full user manual at <https://cat.amadas.com/>

1100 Holland Road, Suffolk, VA 23434
P: 757.539.0231 F: 757.934.3264

www.Amadas.com
sales@Amadas.com

1701 S. Slappy Blvd, Albany, GA 31701
P: 757.539.0231 F: 229.439.9343