

SP20/30 SERIES SOIL PULVERIZERS


25-75 HP | Cat. 1



Ideal for leveling and seedbed preparation.

The SP20 and SP30 Soil Pulverizers have aggressive reversible 10 1/2" x 2" x 1/2" Scarifier shanks to rip crusted soils, enabling the steel spiked roller to break down the soil to a perfect consistency ready for planting.


- Single or double steel spiked roller
- Self-aligning cast 1" bearings with double lip seals
- 1" Diameter shaft in roller

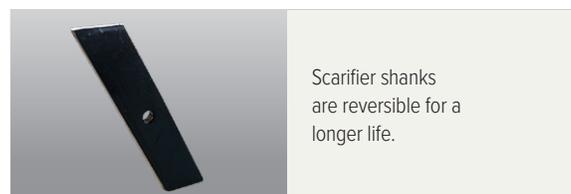


Scarifier shanks are reversible for a longer life.



3/8" Steel spikes are welded to the roller's surface and feature replaceable wear sleeves.



Heavy 1" diameter shaft can handle the shock loads from the roller.

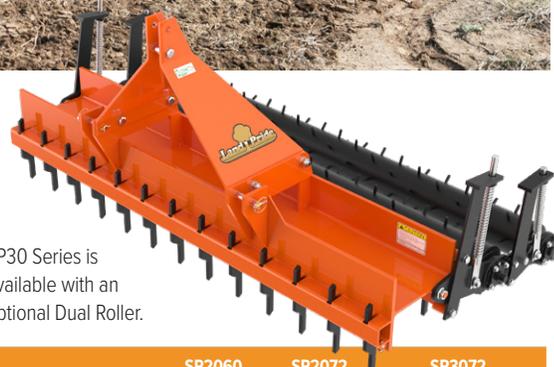

SP30 Series is available with an optional Dual Roller.

	SP2060	SP2072	SP3072
Horsepower	25-55 HP		30-75 HP
Hitch	Cat. 1		Cat. 1
Working Width (cm)	60" (152)	72" (182)	72" (182)
H-Beam	10"		12"
Weight - Sgl Roller - lb (kg)	491 (223)	561 (255)	671 (305)
Front to Back Length - Single Roller	25-1/2"		28-1/4"
No. of Scarifier Shanks	21	25	25
Shank Spacing	2-13/16"		2-13/16"
No. of Spikes on Sgl Roller	86	103	103
No. of Spikes on Dbl Roller	N/A	N/A	206
Spiked Roller Tube Diameter	5-9/16" O.D.		6 5/8" O.D. Optional 2nd Roller 5-9/16"
Roller Spike Material	3/8" x 1-1/4" Steel, Replaceable Heat Treated		3/8" x 1-1/4" Steel, Replaceable Heat Treated
Springs	32 lbs/inch		Front Roller: 32 lbs/inch Rear Roller: 5 lbs/inch
Colors			