



7' & 10' END WHEEL NO-TILL

These machines have long been used by farmers and cattlemen, conservation groups like Pheasants Forever and NRCS for rental machines, and roadside contractors who need simple-to-operate, yet durable machines. These drills feature large end wheels

designed for superior ground-gauging in rugged terrain. Additionally, the inline end wheels minimize sideloading on contours and side hills, dramatically extending the life of the no-till openers.



706NT




1006NT

FEATURES & BENEFITS



06 SERIES OPENER

The 06 Series row unit utilizes an integrally-mounted coulters to cut residue and prepare a mini seedbed for the trailing double-disc opener. The opener discs are 13.5" in diameter and 4mm thick with 205 triple-lip sealed bearings, and are offset 1/4". Our unique full-length seed tube and trailing flap control the seed to the very bottom of the seed trench where the seed stays in place.

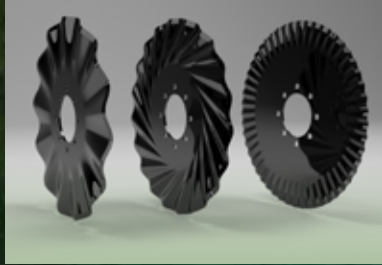

LEAD COULTER OPTIONS

Choose between a wide 3/4" wavy coulters, a 5/8" Turbo coulters blade that is aggressive and prepares a mini seedbed ahead of the opener, or a 5/16" fluted coulters blade that penetrates easily to perform minimum tillage.



PRESS WHEEL OPTIONS

Choices include, from left, single 3"x13" double rib press wheels; 3"x13" center rib press wheels; single 2"x13" smooth press wheels; 1"x12" double V press wheels; or 1.25"x13" wedge-style press wheels that pinch the seed trench closed.



4-SPEED GEARBOX

Changing seed rates is quick and effortless with these permanently lubricated, sealed gearboxes.



END WHEEL DESIGN

Large end wheels stay on side hills and maintain accurate seed placement in undulating terrain. Lockout hubs save drive components from wear.



T-HANDLE DEPTH CONTROL

T-handle offers 18 different positions in 1/8" increments for accurate depth control.

OPTIONS (see website for complete list of features & options)



SMALL SEEDS BOX ATTACHMENT

Mounts directly to the back of the main seed box; 1.68- and 2.4-bushel capacities.



SECOND (DUAL) SEED BOX

Option increases seeding versatility and efficiency; 7- and 10-bushel capacities.



NATIVE GRASS BOX

Aggressive agitator and picker wheels keep fluffy seeds moving through the meter.



GREATPLAINSAG.COM

7' & 10' End Wheel No-Till	Row Spacing	Working Width	Transport Width	Transport Height	Engine H.P. Required	Empty Weight
706NT	7.5"	7'	9' 10"	6' 7"	55+	3,800
1006NT	7.5"	10'	12' 7"	6' 7"	75+	4,300

See GreatPlainsAg.com for complete specifications. Specifications are subject to change without prior notification. Images may not depict current or standard production models.



ADDITIONAL STANDARD FEATURES

- Hydraulic depth stop
- Digital acremeter
- 17.1- (706NT) and 23.75-bu. (1006NT) main seed box capacities
- 1 3/4" fluted feed cups w/ powdered metal flutes
- Calibration crank
- Grease bank
- Direct link press wheel for depth control
- Heavy-duty coil springs
- Seed tubes and flaps
- Walkboard w/ steps
- Spring steel coulters mounting bars
- Watertight manual holder
- Pintle or clevis hitch
- LED safety lighting

FERTILIZER BOX

Easy cleanout and six-point meter wheels accurately meter fertilizer.