




KIOTI UTILITY TRACTOR LK30




KIOTI Utility Tractor LK30

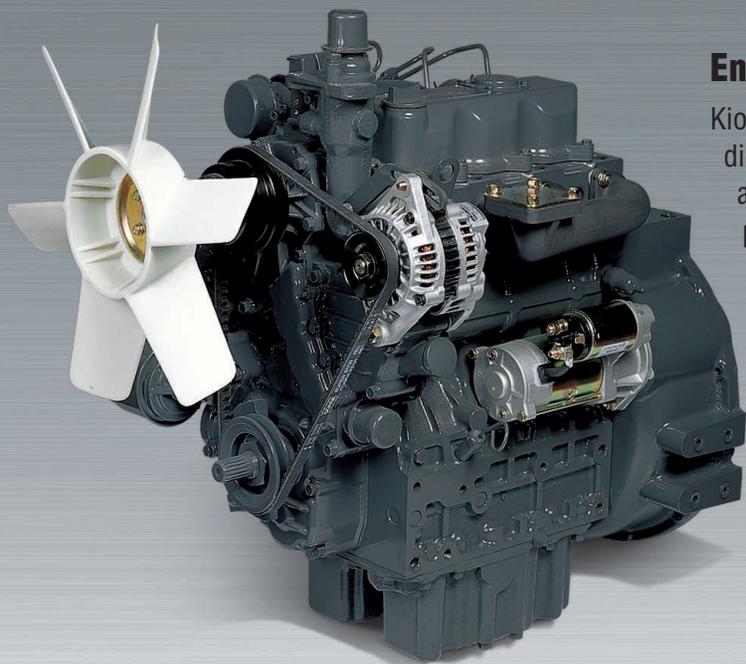

Environmentally Friendly Engine

Kioti offers a quieter, smoother running diesel engine that meets or exceeds EPA and CARB regulations. Kioti engines have passed a stringent 2000 hour durability test equivalent to 5,000 hours of normal operation.

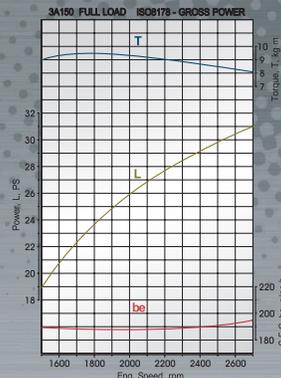

More Hydraulic Power

A larger hydraulic pump provides more power, resulting in implements operating smoother with higher production levels.



8x8 Transmission with Shuttle Shift

8 forward and 8 reverse speeds along with shuttle shift is the perfect combination for those back and forth front-end loader operations. The synchronized main gearshift allows quick and easy shifting. The main transmission shifter is located to the side of the steering wheel providing more room and less obstruction on the center deck, increasing operator comfort and safety.



Dual Stage Air Filter Cartridge

The dual stage air filter protects the engine from harmful dust and dirt, prolonging engine life.




Improved Engine Exhaust

The muffler/exhaust system is located inside the engine compartment for better visibility and neater appearance.

Hydrostatic Power Steering

High-efficiency hydrostatic steering allows smooth and easy maneuvering.

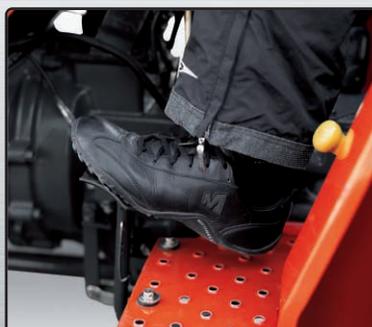

Live PTO with Dual Stage Clutch

Depressing the clutch halfway will stop tractor's movement. Depressing the clutch all the way down will disengage the PTO. The new, larger diameter, dual stage clutch offers more durability and more power, especially when using the TLB package.



Optional TLB Package

The optional TLB package includes a heavy-duty front-end loader and a quick attach backhoe.

- The backhoe is easily attached and detached using the one-touch lever.
- The backhoe includes a unique tilting control console. Tilt it away to provide more room and return to a convenient operating position.
- Reversible stabilizer feet permit safe backhoe operation in a variety of soil conditions - choose a flat foot or an aggressive, spiked grip. An optional oversized stabilizer foot is available for use in very soft soils, providing greater stability.
- The TLB backhoe is designed to provide a large approach angle making it easy to drive the unit on and off of a truck or trailer without the bucket coming in contact with the ground.
- The TLB loader is an extra heavy-duty tool designed for exceptional structural integrity. The loader features stronger arms and the heavy-duty sub-frame attaches to both the front and the sides of the tractor for extra strength.
- The heavy-duty loader bucket has generous rollback and dump angles making easy work of moving and loading materials without spillage.
- A front grill guard provides extra protection during loader operation. It conveniently tilts out of the way for access to the engine compartment.
- The "flip-over" style seat allows easy setup for backhoe operation.





Foldable ROPS

The standard fold-down roll bar makes it quick and easy to maneuver in low-clearance areas. When equipped with the TLB package, the foldable ROPS is replaced with a sturdy 4-post ROPS with a steel plate roof.



Instrument Panel

Tachometer, hour meter, fuel and temperature gauges, battery charge lamp and other instruments are ergonomically located for easy viewing.



3 Point Hitch

Adjustable right side lift rod and top link permit quick and easy implement attachment. The LK30 out-lifts other tractors in its class because of its heavier and longer body.





ISO 9001
NO:954596



ISO 14001
NO:771475



OHSAS 18001
NO:K033008

Specifications

ENGINE	
Model	3A150LWB
Type	3Cyl., In-line Vertical, Water-Cooled 4-Cycle Diesel Engine
Engine gross	30(22.4)(HP)(KW)
PTO	23(17.2) (HP)(KW)
Displacement	91.5(1500) cu.in.(cc)
Rated revolution	2600rpm
Fuel tank capacity	7.4(28) u.s.gal(ℓ)
DRIVE TRAIN	
Clutch	Dual Stage, Dry
Transmission	Constant Shuttle
Speeds	8F 8R
Differential lock	Standard
Brake	Wet Disc Type
PTO	Live
Rear(Optional)	540, 1000
Mid(Optional)	N/A
HYDRAULIC SYSTEM	
Pump	Gear Tandem
Pump capacity(Max. flow rate)	12.7(48.3, 12+6.6cc/rev) gpm(ℓ/min)
3-point hitch	Category I
Maximum lifting capacity(24"aft. of hitch)	1764(800) lbs.(kg)
Hydraulic lift control system	Position Control
Steering	Hydrostatic Power Steering

Standard Equipment

- Power Steering
- Differential Lock
- Rear PTO
- Wet Disc Brakes
- Hyd. Pump w/Diverting Block
- Hand & Foot Throttles
- Adjustable Drawbar
- Adjustable Seat
- Headlights
- Safety Lights
- Safety Start Switch
- Foldable Rops With Seat Belt

TIRE SIZE	
Front AG.(TURF, INDUSTRIAL)	7-14/6(27x8.50-15/4, 25x8.5-14/6)
Rear AG.(TURF, INDUSTRIAL)	11.2-24/6(41x14-20/4, 15-19.5/6)
TRAVELING SPEEDS	
Forward	0.83-11.95(1.34-19.23) mph(km/h)
Reverse	0.76-10.89(1.22-17.53) mph(km/h)
DIMENSIONS	
Overall length(includes 3-pt hitch)	111.4(2830) in.(mm)
Overall width(minimum tread)	51.7(1314) in.(mm)
Overall height(from top of ROPS)	88.6(2250) in.(mm)
Wheelbase	64.6(1640) in.(mm)
Min. ground clearance	10.8(275) in.(mm)
Tread	Front
	Rear
Min. turning radius(with brake)	9.18(2.8) feet(m)
Weight with	ROPS 2897(1314) lbs.(kg)

Optional Equipment

- Front Weights
- Rear Wheel Weights
- Front End Loader
- Backhoe
- Sunshade
- Mower
- Tiller
- Remote Valve



KIOTI Tractor Division
DAEDONG - USA, INC.
6300 KIOTI Drive, Wendell, NC 27591
toll free 877-GO-KIOTI • fax 919-374-5001
web www.KIOTI.com



Part Number LIT-LK30-0