

McCormick TTX Series Tractors

TTX

190-210-230 (T3)



McCORMICK™



McCormick **TTX**,
all-round **innovation**



With the new 190, 210 and 230 models, the McCormick TTX tractors mark a technological breakthrough in the over 180 hp tractor segment.

The TTX tractors are powered by the new BetaPower 6.7L, 24-valve, 6-cylinder turbo-charged engines.

These fuel efficient units feature electronic *Common Rail* injection systems along with a Power Management system giving extra power for PTO work. The new engines offer outstanding torque characteristics resulting in greater performance and flexibility. Innovation is also incorporated into the new XtraSpeed transmission, the unique 8 speed powershift is available with a choice of mechanical or electronic (E/E-PLUS version) range shifting. The XtraSpeed transmission provides 32 speeds and four synchromesh ranges with hydraulic reverse power shuttle.

The electrohydraulically-engaged PTO, featuring a reversible shaft with 6/21 splines, provides two speeds of 540/1000 rpm, while the powerful electronically-controlled rear hitch ensures a maximum lift capacity at 24" of 17,769 lbs.

Optionally, the tractor may be equipped with a front hitch that provides a lift capacity of 7,716 lbs. or 4 tons for extra versatility.

The front axle, available either rigid or with electronically-controlled independent suspension system, offers a steering angle of 55° for improved maneuverability.

The closed-center hydraulics feature a variable-displacement pump with 34 gal/min flowrate and a maximum of five auxiliary hydraulic valves with timer and flow control.

Designed to meet the farmer's needs for maximum safety and comfort, the Deluxe cab offers exceptional all-round visibility. The highly efficient heating and air-conditioning system along with the deluxe air seat and ergonomically arranged controls make the perfect operators environment. In addition the optional hydraulic cab suspension further maximizes the comfort of the cab, making the TTX tractor a pleasure to drive.

If you want to become a leader in the agricultural machinery market, you must build tractors that meet the real needs of farmers.

McCORMICK





**McCormick TTX,
best in class
for features**



ENGINE

The new BETA-POWER 6-cylinder turbo engines are ISO mounted within a rugged chassis frame. Equipped with high-pressure electronic COMMON-RAIL fuel injection system, they deliver 180, 198 and 213 HP (ISO), respectively.

The engine management system ensures optimum clean combustion and low emissions in line with TIER 3 regulations, while providing improved fuel economy and up to 40% torque rise.

Combined with the engine electronics, the Power Management system allows an automatic increase of both the power and torque available at the PTO.

The fully-tilting hood provides unrestricted access to the engine for routine service and maintenance (*fig. A*).

FRONT AXLE

The front axle can be optionally equipped with an electronically-controlled hydraulic suspension system that will ensure high speeds on rough terrains, while improving traction and maneuverability for enhanced comfort, safety and productivity (*fig. B*).



TRANSMISSION

The 'XTRASPEED' electronic transmission provides 32 speeds over four ranges and 8 powershift speeds on-the-go in each range. Equipped with reverse power shuttle, this transmission offers a choice of mechanical (STD version) or electronic (E/E-PLUS version) range shifting.

The electronic version (E/E-PLUS version) is controlled via a joystick allowing all ranges and electronic powershift speeds to be operated by simply pushing a button (*fig. C*).

The electronic system also features a "SKIP SHIFT" function allowing 'smart' shifting through all four ranges. An AUTORODING function provides automatic gear shifting during transport operations.

By selecting the right gear to suit the engine load and rpm, the AUTORODING function ensures simple and smooth driving, which maximizes comfort and productivity while improving fuel economy.

The transmission is also equipped with a hydraulic REVERSE POWER SHUTTLE (*fig. D*) providing a total of 32 forward and 24 reverse speeds. On the electronic versions the shuttle gears may be programmed to further enhance shuttle operations. A creeper unit can also be factory fitted as an option to achieve 48 forward and 40 reverse speeds. A rocker switch ensures easy engagement of the creeper.



HYDRAULICS

The closed-center hydraulic system with variable-displacement pump provides a flowrate of 34 gal/min ensuring fast, smooth operation of all hydraulic functions (*fig. E*).

A higher capacity pump with 43 gal/min is also available as an option. On the E-Plus version, all auxiliary valves are electrohydraulically controlled; one is operated via the pushbuttons integrated into the joystick (1), while the other four are controlled by the joystick controls located on the multi-function armrest (2 and 3) (*fig. F*). This armrest also incorporates the flow and timer controls which can be adjusted to give total implement control and maximize efficiency.

ELECTRONICALLY-CONTROLLED HITCH

With the main up down hitch control (S) conveniently located on the joystick (E-plus models) it allows fingertip control of the three point hitch (*fig. F*). All models feature integrated controls on the right hand console (*fig. G*), for easy operation. The rugged design Cat. 3 linkage provides a lift capacity of 24,141 lbs. or 12 tons.

POWER TAKE-OFF

The wet disc clutch, hydraulically operated via a pushbutton (P) (*fig.F*), enables smooth and progressive engagement of the PTO.


The POWER MANAGEMENT system, which utilizes the engine electronics, allows the power and torque available at the PTO to be automatically increased under load by approximately 15 hp, resulting in enhanced performance and productivity.

An auto PTO function enables the PTO to engage and disengage automatically based on the position of the hitch for added convenience during headland maneuvers.

CAB


The four-post cab with large, rear-hinged doors provides total all-round visibility and allows the operator to enter and exit with ease. It comes standard with a powerful air-conditioning system integrated in to the roof, a fully adjustable steering wheel and air seat with multi-function armrest on the E-Plus version. The stylish interior and excellent sound-proofing make driving a pleasure.

The tractor may be supplied with an electronically-controlled hydraulic cab suspension system, which, combined with the independent front axle suspension, provides maximum driving comfort. (*fig. H*).

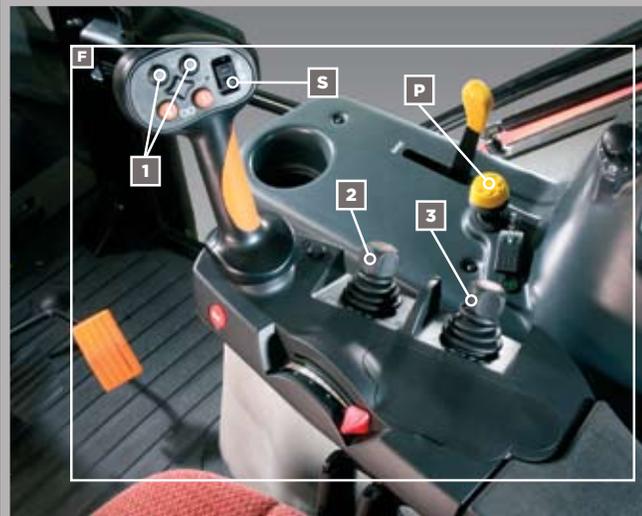

	TTX 190 (T3)	TTX 210 (T3)	TTX 230 (T3)
ENGINE			
TIER 3	BETAPOWER	BETAPOWER	BETAPOWER
ELECTRONIC HIGH PRESSURE COMMON RAIL	●	●	●
MAX. ENGINE POWER (ISO)	HP/KW 180/132	198 / 146	213 / 157
ENGINE POWER WITH POWER MANAGEMENT FOR PTO (ISO)	HP/KW 199 / 146	213 / 157	225 / 165
MAX. TORQUE (WITH POWER MANAGEMENT)	FT/LB (NM) 571/590 (774 (800))	590/627 (800 (850))	627/701 (850 (950))
TORQUE BACKUP (WITH POWER MANAGEMENT)	45% (38%)	38% (37%)	45% (42%)
DISPLACEMENT (CM3) /CYLINDERS/VALVES	6.728 / 6 / 24	6.728 / 6 / 24	6.728 / 6 / 24
FUEL TANK CAPACITY	GAL (LITRES) 92 (350)	92 (350)	92 (350)
CLUTCH			
CLUTCH FORWARD REVERSE POWER SHUTTLE HIGH CAPACITY MULTI DISC CLUTCHES	●	●	●
TRANSMISSION			
XTRASPEED+REV. SHUTTLE: 32FWD+24REV (8 POWERSHIFT SPEEDS) (STD VERSION)	●	●	●
XTRASPEED+CREEPER+REV. SHUTTLE: 48FWD+40REV (STD VERSION)	○	○	○
AUTORODING+REV. SHUTTLE: 32V+24R (8 POWERSHIFT SPEEDS) (E/E-PLUS VERSION)	●	●	●
AUTORODING+CREEPER+REV. SHUTTLE: 48V+40R (E/E-PLUS VERSION)	○	○	○
REVERSE POWER SHUTTLE: UNDER LOAD	●	●	●
ELECTROHYDRAULIC PARK LOCK	○	○	○
REAR ELECTROHYDRAULIC DIFF-LOCK	●	●	●
POWER TAKE-OFF			
NET PTO POWER (ISO RATING)	HP/KW 173/ 129	187/ 139	198/ 148
PTO MULTI-DISC CLUTCH	●	●	●
ELECTROHYDRAULIC CONTROL	●	●	●
2 SPEEDS 540/1000 RPM	●	●	●
4WD FRONT AXLE			
FRONT AXLE INDEPENDENT SUSPENSION	○	○	○
MAX. STEERING ANGLE	55°	55°	55°
TURNING RADIUS	IN (MM) 213 (5.400)	213 (5.400)	213 (5.400)
BRAKES			
OIL-IMMERSED ANNULAR PISTON REAR BRAKES - 6 DISCS	●	●	●
4 WD AUTOMATIC ENGAGEMENT ON BRAKING	●	●	●
"BRAKING BOOSTER SYSTEM" SERVO BRAKE	●	●	●
HYDRAULICS			
VARIABLE-DISPLACEMENT PISTON PUMP	●	●	●
TOTAL HYDRAULIC FLOW	GAL (LITRI)/MIN 34/43 (130 ● / 163) ○	34/43 (130 ● / 163) ○	34/43 (130 ● / 163) ○
MECHANICALLY-OPERATED AUXILIARY VALVES (STD / E VERSION)	STD/OPT 3/4	3/4	3/4
ELECTROHYDR.-OPERATED AUXILIARY VALVES WITH "CAN BUS SPOOL VALVE MANAGEMENT" (E-PLUS VERSION)	STD/OPT 4/5	4/5	4/5
THREE POINT LINKAGE WITH "CAN BUS LIFT CONTROL"			
ELECTRONICALLY OPERATED	●	●	●
FUNCTIONS: POSITION CONTROL, INTERMIX, FLOAT POSITION, RIDE CONTROL	●	●	●
MAX. LIFT CAPACITY	LBS (KG) 24,141 (10.950)	24,141 (10.950)	24,141 (10.950)
CAB AND DRIVING SEAT			
CAB "DELUX" WITH ELECTRONICALLY-CONTROLLED HYDRAULIC SUSPENSION	○	○	○
AIR-CONDITIONING	●	●	●
PNEUMATIC SUSPENSION SEAT WITH "ELECTRONIC ARMREST" (E-PLUS VERSION)	●	●	●
DIMENSIONS AND WEIGHTS			
STD FRONT TIRES	540/65R30	540/65R30	540/65R30
STD REAR TIRES	650/65R42	650/65R42	650/65R42
A - HEIGHT OVER CAB	IN (MM) 118 (3000)	118 (3000)	118 (3000)
B - WHEELBASE	IN (MM) 113 (2873)	113 (2873)	113 (2873)
C - MAX. LENGTH (WITH BALLAST WEIGHTS)	IN (MM) 209 (5307)	209 (5307)	209 (5307)
D - GROUND CLEARANCE 4WD	IN (MM) 18 (470)	18 (470)	18 (470)
E - MINIMUM WIDTH TO THE GROUND	IN (MM) 95 (2415)	95 (2415)	95 (2415)
TOTAL WEIGHT (WITHOUT BALLAST WEIGHTS)	LBS (KG) 16,975 (7700)	16,975 (7700)	16,975 (7700)

Key: ● standard ○ option — not available

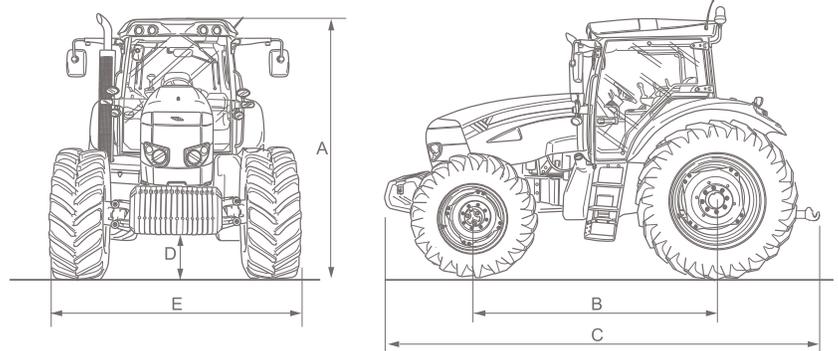

McCormick International USA, Inc.
2590 Breckinridge Blvd. • Duluth, GA 30096
866.327.6733 • www.McCormickUSA.com

McCORMICK™