

New Holland TS6000 Series All-Purpose Tractors 90 and 96 PTO hp TS6020 TS6030



New Holland TS6000 Series tractors deliver big engine and hydraulic power at an economical price. They also provide genuine ease and comfort. Now, that's real value.

Flat deck or all weather cab

TS6000 tractors make your work day productive on the job all day, every day. Choose the new all weather cab with air conditioning and heater to keep you comfortable in all conditions. Front and rear wiper, dual external mirrors, and two additional work lights are standard equipment. If you don't spring for the cab, the flat-deck provides extra legroom and a clear path on and off the tractor. The platform's isolation mounting and deluxe rubber floor mat limit the noise and vibration around you. In both configurations, the steering wheel tilts to four positions for added comfort.

Turbocharged Tier III engines

Dependable 274-cubic-inch-displacement engines are turbocharged and intercooled for maximum performance and fuel efficiency. These engines are Tier III compliant and approved for use with standard fuel or B100 biodiesel (meeting ASTM 6751 standards). The large 42-gallon fuel capacity means you'll refill less often no matter what fuel you use.

Hydraulic power to match your needs

You can outfit the TS6000 tractor with the hydraulic flow and hitch lift capacity that match your implement requirements. You can increase the standard 3,600-pound three-point lift capacity to 5,400 pounds with a single lift assist cylinder or up to 7,200 pounds with two lift assist cylinders. A 7-gpm steering pump and 13-gpm implement pump are standard equipment, or increase the flow available for implements by adding the 9-gpm optional auxiliary pump.

A choice of transmissions, too


Controls are positioned conveniently to your right, no matter which rugged transmission you choose:

- 8F x 2R constant mesh transmission
- 12F x 3R transmission adds a creeper range that includes four forward and 1 reverse creeper speeds
- 16F x 4R Dual Command™ transmission that provides an underdrive gear for each 8x2 gear at the push of a button for added torque.
- 24F x 6R Dual Command™ transmission with 2 creeper ranges

New Holland TS6000 Series Tractor Specifications

MODEL	TS6020	TS6030
ENGINE		
Rated PTO, hp (kW)	90 (67)	96 (71.6)
Engine, hp (kW)	110 (82)	118 (88)
Rated speed (rpm)	2,200	
Cylinders	4	
Displacement, cu. in. (L)	274 (4.5)	
Aspiration	Turbocharged/Intercooled	
Starting aid	Grid heater	
Fuel tank capacity, gal. (l)	42.3 (160)	
TRANSMISSION		
	8F x 2R	
Optional	12F x 3R (8F x 2R with creeper range)	
Optional	16F x 4R	
Optional	24F x 6R (16F x 4R with creeper range)	
PTO		
Type	Independent 540/1000 rpm, wet clutch	
PLATFORM FEATURES		
Isolation mounted flat deck platform	Standard	
Tilt/telescopic steering wheel	Standard	
Retractable seat belt	Standard	
Full coverage fenders	Standard	
Suspended brake and clutch pedals	Standard	
Folding ROPS	Standard	
THREE-POINT HITCH		
Type	Cat II with rigid link ends	
Lift capacity (SAE), lbs. (kg)		
@ 24" behind the ball ends	3,600 (1633)	
w/1 external lift cylinder (opt.)	5,400 (2449)	
w/2 external lift cylinders (opt.)	7,200 (3266)	
Draft control	Mechanical, top link sensing	
HYDRAULICS		
	Open center	
Implement pump flow, gpm (l/m)	13 (49)	13 (49)
Optional auxiliary pump, gpm (l/m)	9 (34)	9 (34)
Steering pump flow, gpm (l/m)	7 (26.5)	7 (26.5)
No. of rear remotes	2 closed center w/flow control	
Adjustable detents	Standard	
ELECTRICAL		
Voltage	12	12
Alternator, amps	120	120
Battery capacity, CCA	950	950
AXLES		
Front 2WD adjustable tread width, in. (mm)	56 to 80 (1422 to 2032)	
Front FWD adjustable tread width, in. (mm)	64 to 80 (1626 to 2032)	
Rear adjustable tread width, in. (mm)	64 to 80 (1626 to 2032)	
Front axle turn angle (2WD / FWD)	55 degrees	
CAB FEATURES		
Doors	2	2
Seat suspension	Mechanical	
Air conditioning	Standard	
Heater	Standard	
Tilt steering wheel	Standard	
Retractable seat belt	Standard	
Suspended brake and clutch pedals	Standard	
WEIGHTS*		
Minimum shipping weight, lbs. (kg)		
2WD ROPS	7,617 (3455)	
2WD Cab	8,503 (3857)	
FWD ROPS	8,413 (3816)	
FWD Cab	9,088 (4122)	
DIMENSIONS*		
Overall length		
2WD, in. (cm)	148.3 (376.7)	
FWD, in. (cm)	155.8 (403.4)	
Height, top of cab, in. (cm)	111.9 (284.2)	
Height, top of ROPS, in. (cm)	109.6 (278.4)	
Height, top of folded roll bar, in. (cm)	83.3 (211.6)	
Height, top of exhaust, in. (cm)	112.4 (285.5)	
Ground clearance, in. (cm)	18.4 (467)	

*with 18.4 x 34 rear tires

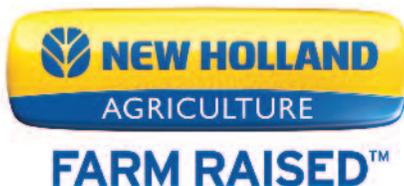

Visit our Web site at www.newholland.com/na Or, call toll-free: 1-888-290-7377

Design, materials and/or specifications are subject to change without notice and without liability therefor. Specifications are applicable to units sold in Canada, the United States, its territories and possessions, and may vary outside these areas.



Safety begins with a thorough understanding of the equipment. Always make sure you and your operators read the Operator's Manual before using the equipment. Pay close attention to all safety and operating decals and never operate machinery without all shields, protective devices and structures in place.