



WORKFORCE OF  
**5,500+** DEDICATED EMPLOYEES  
WITH 400+ ENGINEERS IN R&D



AMONG TOP **5** TRACTOR  
MANUFACTURERS  
GLOBALLY\*



**NO. 1**  
TRACTOR EXPORTER  
FROM INDIA



SOLD IN  
**150+** COUNTRIES  
WORLDWIDE

# Solis

INTERNATIONAL TRACTORS USA CORPORATION

Headquarter - 2332 Mt. Zion Rd, Greenwood,  
AR 72936

Branch Office - 2947 Five Springs Road  
Dalton, GA 30721

Email - sales@solistractors.com | Phone no.+1 (514) 850-9580 | Website: www.solistractorusa.com



SCAN ME



# Solis



## Tough. Rugged. Value



www.solistractorusa.com




# WORLD'S NO.1 INTEGRATED MANUFACTURING PLANT



ROBOTIC PAINTSHOP



ROBOTIC GEAR SHOP

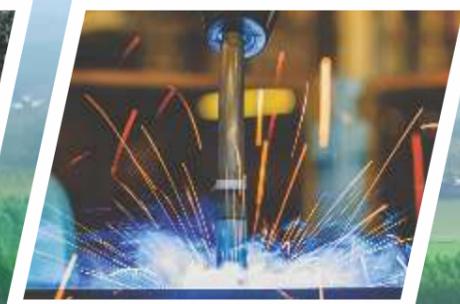

ROBOTIC WELDING



Solis has established as world's No.1 integrated Tractor manufacturing plant in Hoshiarpur, Punjab with a production capacity of 300,000 Tractor annually. The plant is widely spread across acres and has 10 different manufacturing units which produces heavy duty

tractor range of Solis. The quality of the output is because of the highly professional and skilled manpower, with their core as the most effective part. Thus the manufacturing plant provides a complete solution to “total customer satisfaction.”



*Tough. Rugged. Value*

SOLIS IS SOLD IN **150+** COUNTRIES

SOLIS IS THE MARKET LEADER IN **15+** COUNTRIES\*



**AMONG TOP 5**  
WORLD'S LARGEST TRACTOR  
MANUFACTURERS  
(by volume)

**MORE THAN 1.4 MILLION**

**SATISFIED CUSTOMERS WORLDWIDE**

# SOLIS COMPACT TRACTOR RANGE



H24 HYDROSTATIC	
HP Category	24HP
Weight (LBS)	2513
Loader Lift Capacity (LBS)	1411

H24 HYDROSTATIC WITH AC & HEAT CABIN	
HP Category	24HP
Weight (LBS)	3108
Loader Lift Capacity (LBS)	1386


S24 SHUTTLE DRIVE (9+9)	
HP Category	24HP
Weight (LBS)	2513
Loader Lift Capacity (LBS)	1411

S24 GEAR DRIVE (6+2)	
HP Category	24HP
Weight (LBS)	2292
Loader Lift Capacity (LBS)	1411

**H24**  
(Hydrostatic)



Our "All Day Comfort Seat" will allow you to work on long days, and ensure you remain comfortable even during your toughest jobs.

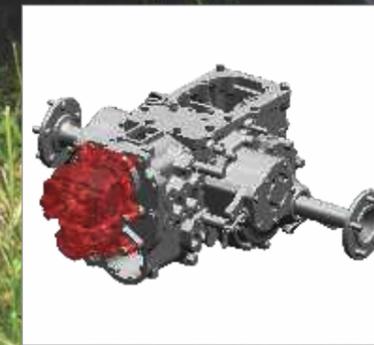

Our clutchless Hydrostatic Transmission allows for easy operation, and is designed to provide the optimal speed suited to your task.



Our control levers are strategically placed for easy access, on both our right and left consoles. Further, our switches are conveniently located near our instrument panel.




**H24**  
(Hydrostatic)

### WIDE OPERATOR PLATFORM

Our wide operator platform, adjustable seat, and large flat deck, contribute to easy ON and OFF of the tractor.

The wide space between the fenders makes you more comfortable during your work.

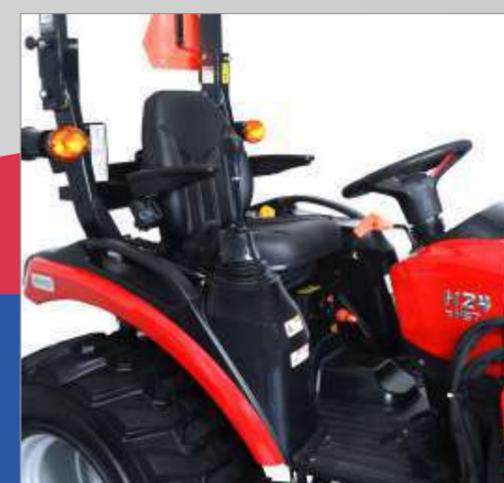

### H24 - POWER AND COMFORTS

Our Compact Series is the ultimate solution for the job, offering so many Accessories to help you get your job finished.

### SPECIAL UTILITY MODEL FEATURES

- Flat Operator Platform
- Deluxe Seat
- Integrated Loader Joystick
- Cup Holder
- Floor Mat
- Mid-PTO
- Cruise Control
- Footstep at Both Sides

# H24

(Hydrostatic)

## OPEN STATION TRACTOR



SEAT WITH ARM REST



CRUISE CONTROL



INTEGRATED LOADER JOYSTICK



FLOOR MAT



MID PTO



LOADER LEVELLER

### ALL STANDARD FEATURES



REAR SWING DRAWBAR



PROJECTOR HEADLAMPS



HYDRAULIC REAR REMOTES



FRONT TOW HOOK



# H24

(Hydrostatic)



## SPECIFICATIONS

FEATURES	H24
<b>ENGINE</b>	
Engine Model	Mitsubishi S3L2
HP Category	24
No. of Cylinder	3
Aspiration	Natural
Cubic Capacity (Ci)	80.42
Rated RPM	2500
Max Torque	76.3Nm @ 2000
<b>TRANSMISSION</b>	
Drive	4WD
Forward/Reverse Controls	Twin Touch Pedals
Gearbox	HST (2 Range)
Transmission Type	Constant Mesh
Cruise Control	Yes
<b>BRAKES</b>	
Type	Oil Immersed Brakes
Type of Actuation	Mechanical, Foot Operated
Differential Lock	Standard
<b>PTO</b>	
PTO (RPM)	Rear - 540 @ 2451 Mid PTO - 2100 @ 2438
PTO Clutch	Wet Type
PTO Actuation	Button Operated
Steering	Power Steering
<b>HYDRAULICS</b>	
3 Point Linkages	CAT-1N
3 Point Lifting Capacity @ ball ends (lbs)	1323
Aux Hydraulic Circuit	1DA (Detent with Float)
Total Hydraulic Flow (GPM)	3.98
<b>CAPACITY</b>	
Fuel Tank (Gal)	7
<b>DIMENSIONS &amp; WEIGHT (AGRI TIRES)</b>	
Weight (lbs)	2513
Wheel Base (in)	61.8
Total Length with TPL (in)	113.98
Total Width (in)	47.83
Height (in) upto ROPS	91.53
Ground Clearance	9.44 (Front Axle)



FEATURES	H24
<b>TIRES</b>	
Industrial	23x8.50-12 & 33x15.5-16.5
Turf 1	23x8.50-12 & 33x15.5-16.5
Turf 2	25x8.50-14 & 13.6x16
Agri 1	6x12 & 8.3x20
Agri 2	7x14 & 8.3x24
Radial Agri	6.5/80-12 & 280/70R18
Galaxy Pro	220/55 R12 & 280/70 R16
R14	23x8.50-12 R14T & 12-16.5 R14T

## LOADER TECHNICAL SPECIFICATION

Loader Model	HL24-N	HL24-M	3200	3200V
NSL/MSL	NSL	MSL	NSL / MSL	NSL / MSL
Max Lifting Height at Pivot Point (in)	82	82	85	85
Clearance with Attachment Dump (in)	61	61	61	58
Reach at Maximum Height (in)	33	34	17	17
Reach at Bucket on Ground (in)	63	63	56	56
Max. Dump Angle (Deg.)	44	42	45	45
Attachment Rollback Angle (Deg.)	31	41	43	43
Digging Depth Below Grade (in)	2.5	2.5	5.9	5.9
Breakout Force at Pivot Point (Dig Position) (lbs)	1565	1477	1058	1146
Bucket Width (in)	48	48	52	52
Lifting Capacity to Full Height at Pivot Point (lbs)	1500	1102	926	1411

\*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All dimensions are with standard tires.

**H24**

**HVAC CABIN  
(Hydrostatic)**

**COMFORT**





## COMFORT

Our large cab provides you a panoramic view. Our ergonomically placed levers are designed to enhance your user experience and ease operations, all with the goal of making it more efficient and productive for you.

**H24**  
HVAC CABIN  
(Hydrostatic)



### STANDARD EQUIPMENT FOR CABIN

- HVAC Cabin (Standard) / Only Heat (Optional)
- Wide Operator Platform
- Mid & Rear PTO
- 2-Stage Opening Rear Window
- Cab Interior Light
- Cruise Control
- Radio Ready
- Front and Rear LED Work Lights
- Side Mirrors
- Deluxe Suspension Seat
- Front & Rear Wiper
- Floor Mat
- Cup Holder
- Integrated Loader Joystick

## SPACIOUS & COMFORTABLE CABIN

The Compact Series delivers incredible comfort for the operator, courtesy of our new integrated cab. The Four Pillar design gives you extra space and a great view of your work area. Our door entry is broad, allowing ease of entrance and exit.

## STYLISH PROJECTOR HEAD LIGHTS

Our stylish EPA compliant projector head lamps project a high intensity, focused, wide spread beam. As a result, you may comfortably continue your work until well after dark.



**H24**  
HVAC CABIN  
(Hydrostatic)



AC/HEATER CABIN



CRUISE CONTROL



INTEGRATED LOADER JOYSTICK



FLOOR MAT



LOADER LEVELLER



PROJECTOR HEADLAMPS



FRONT TOW HOOK



MID PTO



REAR SWING DRAWBAR



HYDRAULIC REAR REMOTES

# ALL STANDARD FEATURES



# H24

**HVAC CABIN  
(Hydrostatic)**



## SPECIFICATIONS

FEATURES	H24 HVAC CABIN
<b>ENGINE</b>	
Engine Model	Mitsubishi S3L2
HP Category	24
No. of Cylinder	3
Aspiration	Natural
Cubic Capacity (Ci)	80
Rated RPM	2500
Max Torque	76Nm@2000
<b>TRANSMISSION</b>	
Drive	4WD
Forward/Reverse Controls	Twin Touch Pedals
Gearbox	HST (2 Range)
Transmission Type	Constant Mesh
Cruise Control	Yes
<b>BRAKES</b>	
Type	Oil Immersed Brakes
Type of Actuation	Mechanical, Foot Operated
Differential Lock	Standard
<b>PTO</b>	
PTO (RPM)	Rear - 540 @ 2451 Mid PTO - 2100 @ 2438
PTO Clutch	Wet Type
PTO Actuation	Button Operated
Steering	Power Steering
<b>HYDRAULICS</b>	
3 Point Linkages	CAT-1N
3 Point Lifting Capacity @ ball ends (lbs)	1323
Aux Hydraulic Circuit	1DA (Detent with Float)
Total Hydraulic Flow (GPM)	3
<b>CAPACITY</b>	
Fuel Tank (Gal)	7
<b>DIMENSIONS &amp; WEIGHT (AGRI TIRES)</b>	
Weight (lbs)	3108
Wheel Base (in)	61
Total Length with TPL (in)	112
Total Width (in)	47
Height (in) upto ROPS	93
Ground Clearance	9 (Front Axle)



FEATURES	H24 HVAC CABIN
<b>TIRES</b>	
Industrial	23x8.50-12 & 33x15.5-16.5
Turf 1	23x8.50-12 & 33x15.5-16.5
Turf 2	25x8.50-14 & 13.6x16
Agri	6x12 & 8.3x20
Radial Agri	6.5/80-12 & 280/70R18
Galaxy Pro	220/55 R12 & 280/70 R16
R14	23x8.50-12 R14T & 12-16.5 R14T
R14	25X8.50-14 & 14-17.5

## LOADER TECHNICAL SPECIFICATION

Loader Model	HL24-N	HL24-M	3200	3200V
NSL/MSL	NSL	MSL	NSL / MSL	NSL / MSL
Max Lifting Height at Pivot Point (in)	82	82	85	85
Clearance with Attachment Dump (in)	61	61	61	61
Reach at Maximum Height (in)	33	34	17	13
Reach at Bucket on Ground (in)	63	63	56	57
Max. Dump Angle (Deg.)	44	42	45	45
Attachment Rollback Angle (Deg.)	31	41	43	43
Digging Depth Below Grade (in)	2	2	5.9	5
Breakout Force at Pivot Point (Dig Position) (lbs)	1565	1477	1058	1058
Bucket Width (in)	48	48	52	51
Lifting Capacity to Full Height at Pivot Point (lbs)	1500	1102	926	1366

\*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All dimensions are with standard tires.

**S24** (9F+9R)  
SHUTTLEXL (SHUTTLE DRIVE)



**24** (9F+9R)  
SHUTTLE XL (SHUTTLE DRIVE)

# VERSATILE PERFORMER



SEAT WITH ARM REST



SHUTTLE (FORWARD/REVERSE)



FLOOR MAT



LOADER LEVELER



PROJECTOR HEADLAMPS



9F + 9R SPEEDS TRANSMISSION



100% METAL HOOD



REAR SWING DRAWBAR

## ALL STANDARD FEATURES



HYDRAULIC REAR REMOTES



FRONT TOW HOOK



**S24 (9F+9R)**  
SHUTTLEXL (SHUTTLE DRIVE)

### WIDE OPERATOR PLATFORM

Our wide operator platform, adjustable seat, and large flat deck, contribute to easy ON and OFF of the tractor.

The wide space between the fenders makes you more comfortable during your work.



### S 24 XL - POWER AND COMFORTS


Our Compact Series is the ultimate solution for the job, offering so many accessories to help you get your job finished.

### SPECIAL UTILITY MODEL FEATURES

- Flat Operator Platform
- Deluxe Seat
- Cup Holder
- Floor Mat
- 9F+9R Transmission
- Footstep at Both Sides

# 24 (9F+9R)

SHUTTLE XL (SHUTTLE DRIVE)

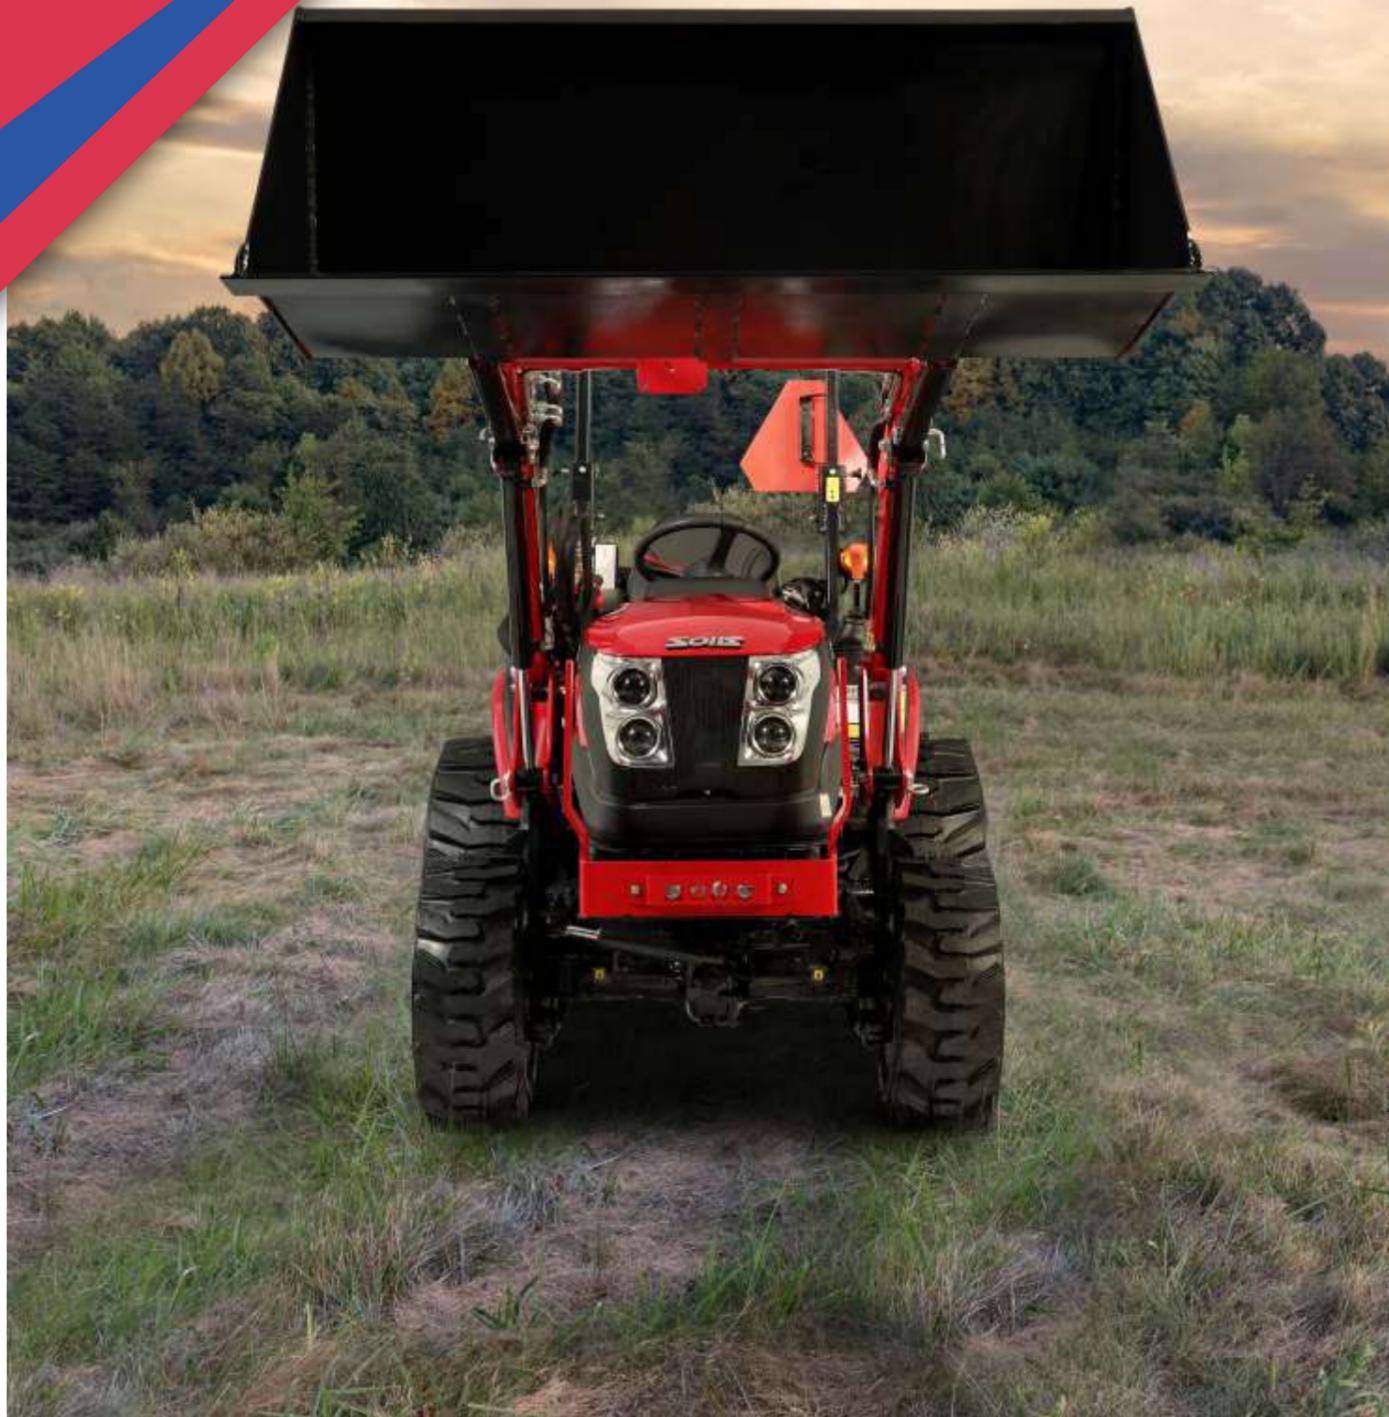

## SPECIFICATIONS

FEATURES	24 Shuttle XL
<b>ENGINE</b>	
Engine Model	Mitsubishi S3L2
HP Category	24
No. of Cylinder	3
Aspiration	Natural
Cubic Capacity (Ci)	80.42
Rated RPM	2500
Torque	76.3 Nm @ 2000
<b>TRANSMISSION</b>	
Drive	4WD
Forward/Reverse Lever	Synchromesh Shuttle Lever on Dashboard
Gearbox	9+9
Transmission Type	Constant Mesh with Synchromesh Shuttle Transmission
Cruise Control	Yes
<b>BRAKES</b>	
Type	Oil Immersed Brakes
Type of Actuation	Mechanical, Foot Operated
Differential Lock	Standard
<b>PTO</b>	
PTO (RPM)	540/540E
PTO Actuation	Mechanical
Steering	Power Steering
<b>HYDRAULICS</b>	
3 Point Linkages	CAT-1N
3 Point Lifting Capacity @ ball ends (lbs)	1323
Aux Hydraulic Circuit	1DA (Detent with Float)
Total Hydraulic Flow (GPM)	6.5
<b>CAPACITY</b>	
Fuel Tank (Gal)	5.8
<b>DIMENSIONS &amp; WEIGHT (AGRI TIRES)</b>	
Weight (lbs)	2513
Wheel Base (in)	61.8
Total Length (in)	113.98
Total Width (in)	47.83
Height (in) upto ROPS	91.53
Ground Clearance	9.44 (Front Axle)

\*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All dimensions are with standard tires.



FEATURES	24 Shuttle XL
<b>TIRES</b>	
Industrial	23x8.50-12 & 33x15.5-16.5
Turf 1	23x8.50-12 & 33x15.5-16.5
Turf 2	25x8.50-14 & 13.6x16
Agri 1	6x12 & 8.3x20
Agri 2	7x14 & 8.3x24
Radial Agri	6.5/80-12 & 280/70 R18
Galaxy Pro	220/55 R12 & 280/70 R16
R14	23x8.50-12 R14T & 12-16.5 R14T

## LOADER TECHNICAL SPECIFICATION

Loader Model	3200 V
NSL/MSL	NSL/MSL
Max Lifting Height at Pivot Point (in)	85
Clearance with Attachment Dump (in)	58
Reach at Maximum Height (in)	17
Reach at Bucket on Ground (in)	56
Max. Dump Angle (Deg.)	45
Attachment Rollback Angle (Deg.)	43
Digging Depth Below Grade (in)	5.9
Breakout Force at Pivot Point (Dig Position) (lbs)	1146
Bucket Width (in)	52
Lifting Capacity to Full Height at Pivot Point (lbs)	1411

# S24

(Manual Drive 6F+2R)

## VERSATILE PERFORMER



TOOL BOX



FLOOR MAT



HEAVY DUTY FRONT AXLE



LOADER LEVELLER



HEAVY DUTY FRONT LOADER



GRAB RAILS

### ALL STANDARD FEATURES



REAR SWING DRAWBAR



PROJECTOR HEADLAMPS



HYDRAULIC REAR REMOTES



FRONT TOW HOOK



# S24

(Manual Drive 6F+2R)



## SPECIFICATIONS

FEATURES	S24
<b>ENGINE</b>	
Engine Model	Mitsubishi S3L2
HP Category	24
No. of Cylinder	3
Aspiration	Natural
Cubic Capacity (Ci)	80.42
Rated RPM	2500
Torque	76.2 Nm @ 2000
<b>TRANSMISSION</b>	
Drive	4WD
Clutch	Single
Gearbox	6F+2R
<b>BRAKES</b>	
Type	Oil Immersed Brakes
Type of Actuation	Mechanical, Foot Operated
Differential Lock	Standard
<b>PTO</b>	
PTO (RPM)	540 @ 2491
PTO Actuation	Mechanical
Steering	Power Steering
<b>HYDRAULICS</b>	
3 Point Linkages	CAT-1N
3 Point Lifting Capacity @ ball ends (lbs)	1323
Aux Hydraulic Circuit	1DA
Total Hydraulic Flow (GPM)	3.27 GPM
<b>CAPACITY</b>	
Fuel Tank (Gal)	7
<b>DIMENSIONS &amp; WEIGHT (AGRI TIRES)</b>	
Weight (lbs)	2292
Wheel Base (in)	61.4
Total Length (in)	108.66
Total Width (in)	42.32
Height (in) upto ROPS	84.34
Ground Clearance	9.44 (Front Axle)



FEATURES	S24
<b>TIRES</b>	
Industrial	23x8.50-12 & 33x15.5-16.5
Turf	23x8.50-12 & 33x15.5-16.5
Agri 1	6x12 & 8.3x20
Agri 2	7x14 & 8.3x24
Radial Agri	6.5/80-12 & 280/70 R18
Galaxy Pro	220/55 R12 & 280/70 R16
R14	23x8.50-12 R14T & 12-16.5 R14T

## LOADER TECHNICAL SPECIFICATION

Loader Model	3200	3200 V
NSL/MSL	NSL/MSL	NSL/MSL
Max Lifting Height at Pivot Point (in)	85	85
Clearance with Attachment Dump (in)	61	58
Reach at Maximum Height (in)	17	17
Reach at Bucket on Ground (in)	56	56
Max. Dump Angle (Deg.)	45	45
Attachment Rollback Angle (Deg.)	43	43
Digging Depth Below Grade (in)	5.9	5.9
Breakout Force at Pivot Point (Dig Position) (lbs)	1058	1146
Bucket Width (in)	52	52
Lifting Capacity to Full Height at Pivot Point (lbs)	926	1411

\*Data and specifications are subject to change without any advance notice due to continuous product improvement and development. All dimensions are with standard tires.

# SOLIS LOADER ATTACHMENT ADD-ONS (SKID STEER QUICK ATTACH)



60 Inch Bucket




47 Inch Grabber



47 Inch Grapple



60 Inch Multi-Purpose 4-in-1



Bale Spike



Pallet Fork



3rd Function Kit

# SOLIS LOADER ATTACHMENT ADD-ONS (SKID STEER QUICK ATTACH) SPECIFICATION

BUCKET TYPE	STD BUCKET 1.5M SKIDSTEER HITCH	STD BUCKET 1.35M
<b>SERIES</b>	<b>2000</b>	<b>2000</b>
HP Range	15-24	15-24
Struck Capacity (cu Yd)	0.22	0.20
Heaped Capacity (cu Yd)	0.26	0.22
Dimensions LxWxH (inches)	61x19x20	55x20.1x20
Weight (lbs)	182.6	150.7
Working Depth (inches)	4.2	4.2
Side Wall Thickness (inches)	0.1	0.2
Cutting Edge Thickness (inches)	0.5	0.5

BUCKET TYPE	GRABBER BUCKET SKID STEER HITCH 1.35M
<b>SERIES</b>	<b>2000</b>
HP Range	15-24
Struck Capacity (cu yd)	0.16
Heaped Capacity (cu yd)	0.22
Dimensions LxWxH (inches)	53.6x21x24.8
Weight (lbs)	279
Grabber Opening Height (inches)	23.6
Number of Tines (Non Removable)	8
Tine Thickness (inches)	0.3
Number of Hydraulic Cylinder	1
Maximum Hydraulic Pressure (psi)	2610

BUCKET TYPE	GRAPPLE BUCKET 1.4 M SKID STEER HITCH
<b>SERIES</b>	<b>2000</b>
HP Range	15-24
Struck Capacity (cu Yd)	0.13
Heaped Capacity (cu Yd)	0.22
Dimensions LxWxH (inches)	56x20x25
Weight (lbs)	296
Grapple Opening Height (inches)	34.8
Number of Tines (non removable)	5
Tine Thickness (inches)	0.2
Number of Hydraulic Cylinder	2
Maximum Hydraulic Pressure (psi)	2610


BUCKET TYPE	4 IN 1 BUCKET 1.5M SKID STEER HITCH
<b>SERIES</b>	<b>2000</b>
HP Range	15-24
Struck Capacity (cu Yd)	0.24
Heaped Capacity (cu Yd)	0.27
Dimensions LxWxH (inches)	60x22.2x21.7
Weight (lbs)	277
Maximum Hydraulic Pressure (psi)	2610
Number of Hydraulic Cylinder	2
Clamshell Opening Angle (degree)	90

BUCKET TYPE	BALE SPIKE
<b>SERIES</b>	<b>2000</b>
HP Range	15-24
Lift Capacity (lbs)	660
Dimensions LxWxH (inches)	47.5x43x25
Weight (lbs)	202
Usable Spear Length (Big) (inches)	43.3
Usable Spear Length (Small) (inches)	27
No of Spears	3

BUCKET TYPE	PALLET FORK SKID STEER HITCH
<b>SERIES</b>	<b>2000</b>
HP Range	15-24
Lift Capacity (lbs)	660
Dimensions LxWxH (inches)	45x30.5x25.7
Weight (lbs)	200
Tine Thickness (inches)	0.2
Tine Length (inches)	28
Tine Width (inches)	4
Tine Height (inches)	2

# BACK HOE

Solis Backhoe is a versatile machine and performs exceptionally in loading, digging, backfilling & trenching applications. Its superior features like Heavy Duty Boom & Stick, Ergonomically designed operator seat & quick attach & detach with tractor makes it a perfect choice for compact & subcompact range of tractors

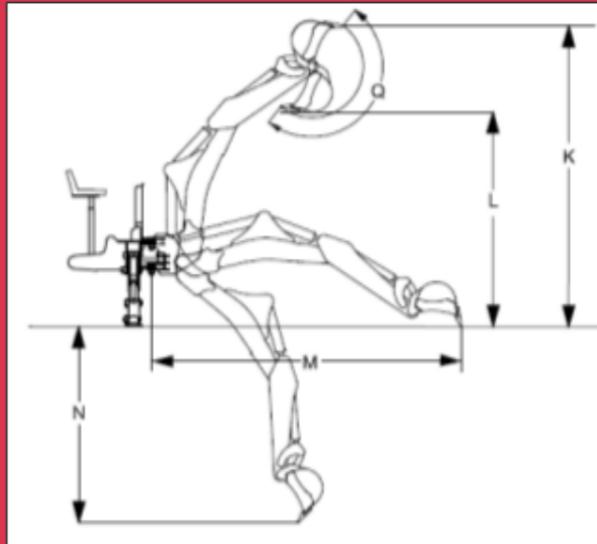

**SUPERIOR PILOT OPERATED CHECK VALVE**



**HIGHER CAPACITY WALVOIL VALVE**



**ERGONOMICALLY DESIGNED OPERATOR CONSOLE**



**EASY TO ATTACH & DETACH WITH TRACTOR**



**HEAVY DUTY BOOM & STICK**



**EFFICIENT HYDRAULIC DISTRIBUTORS WITH PRESSURE RELIEF VALVES**

<b>i</b> Model Name	<b>SLBH-155</b>
Max Working Height (K) (inch)	82.87
Max Load Over Height (L) (inch)	61.02
Reach Ground Level to Slew Center (M) (inch)	88.2
Max Digging Depth (N) (inch)	60.03
Bucket Rotation Power (Degree)	180
Bucket Volume (m <sup>3</sup> )	0.03
Bucket Breakout Force (lbs)	2400
Ground Clearance (inch)	11.8
Pressure (Bar)	160
3 Point Hitch	Cat -1
Tractor Power (HP)	20-30
Weight with Standard Bucket (lbs)	826.7
Mechanical Thumb	Optional
Bucket 14 inch	Optional
Bucket 16 inch	Optional

\*Data and specifications are subject to change without any advance notice due to continuous product improvement & development

# MID MOUNT MOWER 24 HST

Definition of Effortless Mowing to Save your Moments!

Solis Mid Mount Mower, compatible to Solis 24HST Tractors is known for its unrivalled quality & performance. Its easy manoeuvrability, compact design & easy attach-detach makes it the best choice for farmers. The cutting section consists of 3 high quality cutting blades with high tips speed which increase the efficiency of mowing. The side discharge with well built chute helps in vacuum build up inside the mower & helps in even & efficient mowing.

The enhanced manoeuvrability due to presence of cutting deck in the middle of tractor helps mid mower take sharp turns easily. Solis Mid Mount Mower is best suited for terrains with more obstacles & trees.



**SIDE DISCHARGE CHUTE FOR EVEN DISCHARGE AT HIGH RATE**



**HIGH PERFORMANCE GEARBOX**



**BORON STEEL BLADES WITH HIGH TIP SPEED**



**FRONT ROLLER TO AVOID SCALPING**



**EASY HEIGHT ADJUSTMENT FOR VARIABLE CUTTING HEIGHT**

	Model Name	<b>SLMM-60</b>
	No. of Blades	3
	Mounting Method	Parallel linkage with Hydraulic Cylinder
	Discharge	Side Discharge
	Cutting Width (inch)	59.6
	Cutting Height (inch)	1~3.5
	Overall Width (inch)	73.2
	Weight (lbs)	353
	Belt	Single V-Belt
	Blade Spindle Speed	2718 RPM
	Blade Tip Speed	14510 fpm (73.7 m/s)
	Blade Length (inch)	20.6
	Number of Antiscalp Rollers	4+1
	Mower Deck Thickness (inch)	4
	Mower Deck Height (inch)	4
	Transport Height (inch)	4
	Tractor Tire (Wider Turf)	25x8.50-14 & 13.6x16

# FINANCING AVAILABLE WITH



# SOLIS DEALER LOCATOR

SOLIS, in collaboration with DLL, is pleased to offer dealers total financing solutions to help grow their business. From credit lines for inventory purchases to consumer financing options, DLL can help you sell more products while improving your cash flow management.

## BENEFITS

**\$0 DOWN**  
FINANCING AVAILABLE  
FOR UP TO 84 MONTHS

**NO PAYMENT FOR 90 DAYS\***

## PROGRAM DETAILS

- COMPETITIVE RATES
- QUICK CREDIT DECISIONS
- FLEXIBLE PAY BACK SCHEDULE



SCAN QR CODE  
TO APPLY NOW



SCAN QR CODE TO  
LOCATE YOUR DEALER

# OPTIONAL EQUIPMENT FOR SOLIS TRACTORS



**3RD FUNCTION KIT**



**MSL LOADER OPTION**



**CANOPY FOR H24 AND S24 SHUTTLE DRIVE MODEL**